




Features

- Driver inside
- HID Replacement
- Opal

Applications

- Floodlights
- High Bay Lamps
- Low Bay lamps

Article number	CT 30012
Lamp Finish	White
Wattage (W)	38
Dimmable	No
Lumens (lm)	5000
CRI (Ra)	80
CCT (K)	4000
Beam Angle (deg)	360
Measurements (mm)	90x225
Energy efficiency class	A+
PF	0.9
Voltage (V)	AC 220-240V
Frequency (Hz)	50/60
Current (mA)	158
Socket	E27
Switching Cycles	100.000
Lifespan (hrs)	25.000
Working Temperature (°C)	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60
Weight (g)	150
EAN code	4060574300124

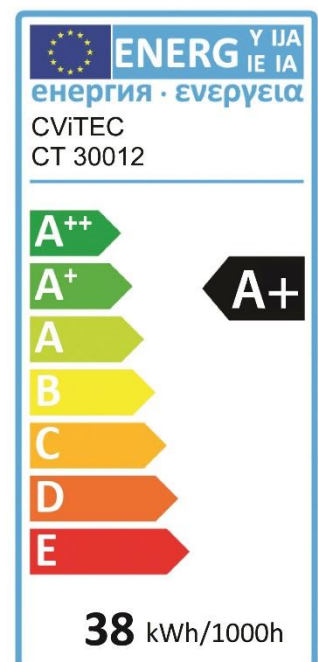

* Note: Data is subject to change without prior notice. Please visit www.civilight.nl for further information.

Cautions

- Power off before replacement
- Don't touch the lamp when lighting

CIVILIGHT LIGHTING CO., LTD

Address 5/F, Building D, HongFa Hi-Tech Park, Shiyan, Shenzhen, China W: www.cvitec.info

VEZALUX B.V.

Wernhoutseweg 38A, 4884 AW, Wernhout, The Netherlands

Tel: +31 (0)76 5971220, Fax: +31 (0)76-5976841 E: info@vezalux.nl W: www.civilight.nl