


Features

- Integrated design, driver inside,
- Easy to install, reliable metal design
- Perfect match to classic and modern downlight and fitting
- CE and RoHS2 compliant

Applications

- Home, villa and other residential buildings
- Hotels, restaurants, bars, cafes

| Part No. | Module 6W CVM 001W06 - 7515 |
|--------------------------|-----------------------------|
| Article number | CL 7515 |
| Halogen equivalent (W) | 60 |
| Wattage (W) | 6 |
| Dimmable | No |
| Lumens (lm) | 400 |
| CRI(Ra) | 90 |
| CCT (K) | 4000 |
| Beam Angle (deg) | 36 |
| Luminous Intensity(cd) | 1000 |
| Energy efficiency class | A |
| PF | 0.5 |
| Voltage (V) | AC176-264V |
| Frequency(Hz) | 50/60 |
| Current (mA) | 53 |
| Socket | - |
| Switching Cycles | 100000 |
| Lifespan(hrs) | 25000 |
| Working Temperature(°C) | -20 ~ 40 |
| Storage Temperature (°C) | -20 ~ 60 |
| Weight(g) | 77 |
| EAN code | 6901029075151 |

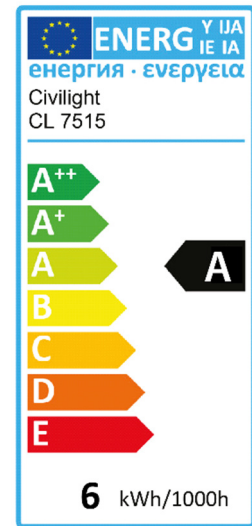

* Note: Data is subject to change without prior notice. Please visit www.civilight.com for further information.

Cautions

- Power off before replacement
- Don't touch the lamp when lighting
- Don't use it in sealed fixture

CIVILIGHT LIGHTING CO., LTD

Address 5/F, Building D, HongFa Hi-Tech Park, Shiyan, Shenzhen, China W: www.civilight.com

VEZALUX B.V.

Wernhoutseweg 38A, 4884 AW, Wernhout, The Netherlands

Tel: +31 (0)76 5971220, Fax: +31 (0)76-5976841 E: info@vezalux.nl W: www.civilight.nl