


Features

- Integrated design, driver inside,
- Easy to install, reliable metal design
- Perfect match to classic and modern downlight and fitting
- CE and RoHS2 compliant

Applications

- Home, villa and other residential buildings
- Hotels, restaurants, bars, cafes

Part No.	Module 6W CVM 001W06 - 7516
Article number	CL 7516
Halogen equivalent (W)	60
Wattage (W)	6
Dimmable	No
Lumens (lm)	400
CRI(Ra)	90
CCT (K)	5700
Beam Angle (deg)	36
Luminous Intensity(cd)	1000
Energy efficiency class	A
PF	0.5
Voltage (V)	AC176-264V
Frequency(Hz)	50/60
Current (mA)	53
Socket	-
Switching Cycles	100000
Lifespan(hrs)	25000
Working Temperature(°C)	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60
Weight(g)	77
EAN code	6901029075168

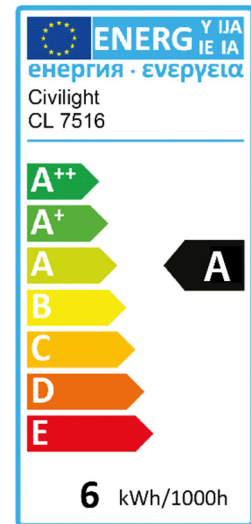

* Note: Data is subject to change without prior notice. Please visit www.civilight.com for further information.

Cautions

- Power off before replacement
- Don't touch the lamp when lighting
- Don't use it in sealed fixture

CIVILIGHT LIGHTING CO., LTD

Address 5/F, Building D, HongFa Hi-Tech Park, Shiyan, Shenzhen, China W: www.civilight.com

VEZALUX B.V.

Wernhoutseweg 38A, 4884 AW, Wernhout, The Netherlands

Tel: +31 (0)76 5971220, Fax: +31 (0)76-5976841 E: info@vezalux.nl W: www.civilight.nl