


Features

- Perfect output lighting effect
- High performance
- IP65
- CE and ROHS compliant
- Die-cast aluminum body
- Extremely thin

Applications

- Home, hotels, villa and other residential buildings
- Luxurious franchised store, museum, auditoria,

Part No.	Floodlight CEF001W30 BL – E5007
Article number	CL E5007
Wattage (W)	30
Dimmable	No
Lumens (lm)	2000
CRI(Ra)	80
CCT (K)	3000
Beam Angle (deg)	120
Luminous Intensity(cd)	1000
Energy efficiency class	A
PF	0.5
Voltage (V)	AC 85-265V
Frequency(Hz)	50/60
Current (mA)	-
Socket	-
Switching Cycles	100000
Lifespan(hrs)	25000
Working Temperature(°C)	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60
Weight(g)	813
EAN code	6901029570076

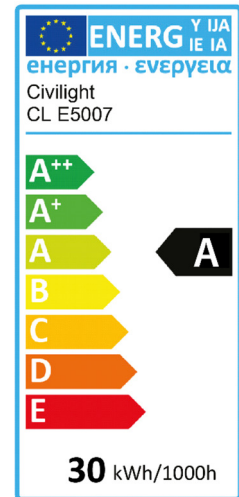

* Note: Data is subject to change without prior notice. Please visit www.civilight.com for further information.

Cautions

- Power off before replacement
- Don't touch the lamp when lighting
- Don't use it in sealed fixture

CIVILIGHT LIGHTING CO., LTD

Address 5/F, Building D, HongFa Hi-Tech Park, Shiyan, Shenzhen, China W: www.civilight.com

VEZALUX B.V.

Wernhoutseweg 38A, 4884 AW, Wernhout, The Netherlands

Tel: +31 (0)76 5971220, Fax: +31 (0)76-5976841 E: info@vezalux.nl W: www.civilight.nl