




### Features

- Integrated design, driver inside,
- Easy to install
- CE and RoHS2 compliant

### Applications

- Home, villa and other residential buildings
- Hotels, restaurants, bars, cafes

| Article number           | CL 40001      |
|--------------------------|---------------|
| Halogen equivalent (W)   | 40            |
| Wattage (W)              | 6             |
| Dimmable                 | No            |
| Lumens (lm)              | 430           |
| CRI(Ra)                  | 90            |
| CCT (K)                  | 2700          |
| Beam Angle (deg)         | 100           |
| Measurements (mm)        | 50x83         |
| Energy efficiency class  | A             |
| PF                       | 0.5           |
| Voltage (V)              | AC220-240V    |
| Frequency(Hz)            | 50/60         |
| Current (mA)             | 25            |
| Socket                   | E14           |
| Switching Cycles         | 100000        |
| Lifespan(hrs)            | 25000         |
| Working Temperature(°C)  | -20 ~ 40      |
| Storage Temperature (°C) | -20 ~ 60      |
| Weight(g)                |               |
| EAN code                 | 6901029400014 |

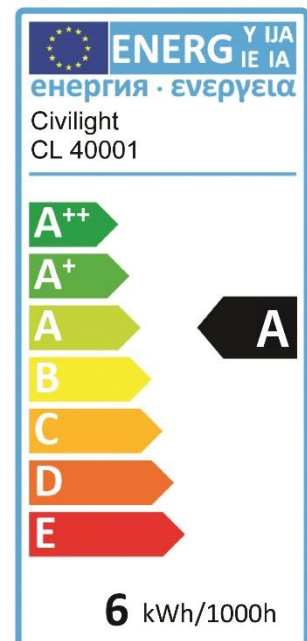

\* Note: Data is subject to change without prior notice. Please visit [www.civilight.com](http://www.civilight.com) for further information.

### Cautions

- Power off before replacement
- Don't touch the lamp when lighting
- Don't use it in sealed fixture

### CIVILIGHT LIGHTING CO., LTD

Address 5/F, Building D, HongFa Hi-Tech Park, Shiyan, Shenzhen, China W: [www.civilight.com](http://www.civilight.com)

### VEZALUX B.V.

Wernhoutseweg 38A, 4884 AW, Wernhout, The Netherlands

Tel: +31 (0)76 5971220, Fax: +31 (0)76-5976841 E: [info@vezalux.nl](mailto:info@vezalux.nl) W: [www.civilight.nl](http://www.civilight.nl)