



GE
Lighting



A+
energy class

94
lumens/watt

LED Integrated Bulkhead

BHTD25-17657S-NNN

93073535

Product information

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

GE Lighting 93073535 BHTD25-17657S-NNN

This luminaire contains built-in LED lamps.

LED

The LED lamps cannot be changed in the luminaire

874/2012

Application areas

Education

Office

Retail

Product data

Mounting type	Wall mounted
Dimensions	ø250 x 102 mm
Energy efficiency class (EEC)	A+
IP Rating	65
Certifications	CE
Impact resistance	IK10
Weight [kg]	0,7
DIALux description	GE - LED Integrated Bulkhead - 1600lm - 17W - 6500K - 80CRI - 93073535[SKU] - Wall mounted
Body colour	white

Performance data

Rated life L70/B50 [h]	50000
Operating Voltage	220-240V
Ambient Temperature [°C]	-10C to +40C
Rated efficacy [lm/W]	94
Current [A]	0,84
Total system power	17
Rated lumens [lm]	1600
Rated power [W]	17
Nominal correlated colour temperature (CCT) [K]	6500
Colour rendering index (CRI) [Ra]	80+

Optical data

Nominal beam angle [°]	125
------------------------	-----


Electrical data

Nominal lamp power factor	>0.9
Class	Class II
Controllability	Constant Current Driver

Logistic data

Product status	Available
Pack quantity	1

Photometric Data

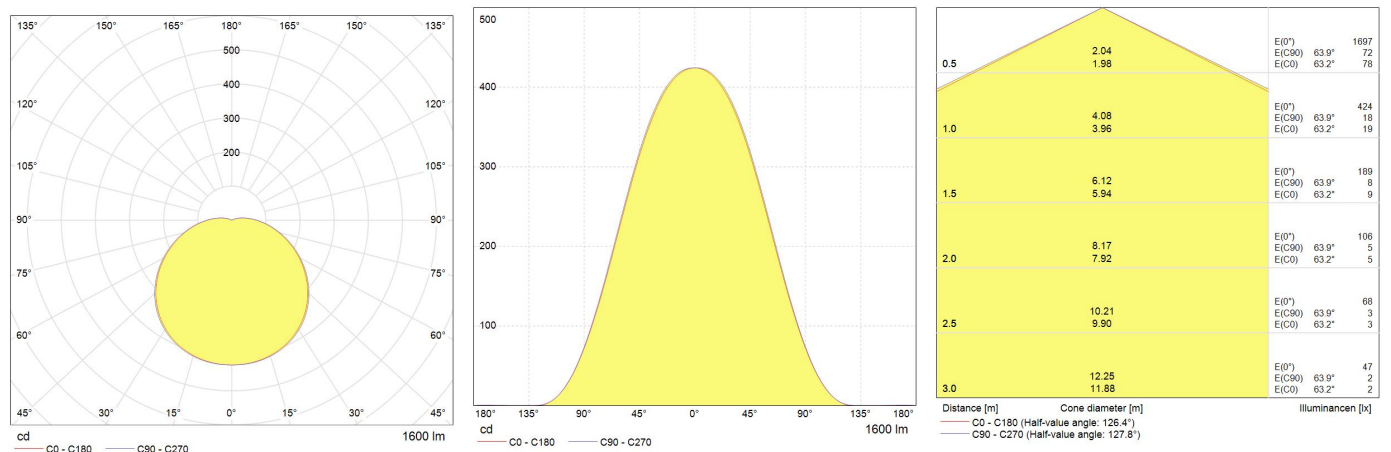

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Images \(HTTP\)](#)

[Dialux offline Plugin \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)