
Trungsram

Innovation is our heritage EST.1896





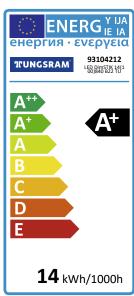

Dimmable Bright Stik™ LED DimSTIK 14(100)840 B22 TU 93104212

Product information

TUNGSRAM keeps innovating and introduces the Dimmable Bright Stik to complete the most successful range* in the LED lamps to replace CFL and eCFL.

Bright Stik™ Led Lamp range won the IDEA
 Bronze design award in 2017 and the IF Design award in 2018

Application areas











Dimmable Bright Stik™ LED DimSTIK 14(100)840 B22 TU 93104212

Product data

Product Code	93104212
Bulb Shape	T45
Bulb Finish	White
Bulb maximum overall diameter [mm]	45
Nominal Length [mm]	136
Net weight per piece [g]	74
Dimmability	Yes
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	B22

Performance data

Nominal/ Rated Beam Angle [°]	240
Rated Lumens [lm]	1521
Weighted energy consumption [kWh/1000h]	14
Rated efficacy [lm/W]	108.64
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]]	4000
Nominal lumens [lm]	1521
Colour Rendering Index (CRI) [Ra]	80

Dimmable Bright Stik™ LED DimSTIK 14(100)840 B22 TU 93104212


Electrical data

Nominal lamp power factor	>0.7
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Starting time (sec)	<0.5 s
Warm up time up to 60% of full light output	Instant on
Warm up time up to 60% of full light output Number of switching cycles	Instant on 50k

Logistic data

Shipment	Standard
DUN Code	15994100019975
EAN Code	5994100019978
Pack Quantity	15
Product status	Available

Photometric Data

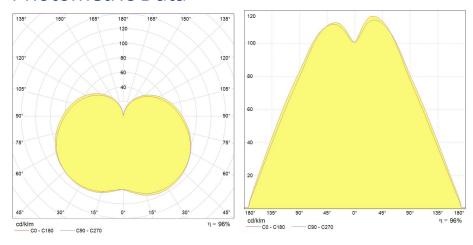



Dimmable Bright Stik™ LED DimSTIK 14(100)840 B22 TU 93104212

Downloads & Links

Go to the catalog site (HTTP)
Photometry (IES)
Product datasheet (PDF)
Datasheet (PDF)
Images (HTTP)

