

## Dimmable Bright Stik™

LED DimSTIK 9(60)840 E27 TU

93104356

### Product information

TUNGSRAM keeps innovating and introduces the Dimmable Bright Stik to complete the most successful range\* in the LED lamps to replace CFL and eCFL.

- Bright Stik™ Led Lamp range won the IDEA

Bronze design award in 2017 and the IF Design award in 2018

### Application areas

- Office
- Hospitality
- Home
- Other

## Product data

|                                    |          |
|------------------------------------|----------|
| Product Code                       | 93104356 |
| Bulb Shape                         | T38      |
| Bulb Finish                        | White    |
| Bulb maximum overall diameter [mm] | 38       |
| Nominal Length [mm]                | 116      |
| Net weight per piece [g]           | 46       |
| Dimmability                        | Yes      |
| RoHS compliant                     | Yes      |
| Brand                              | TungsrAm |
| Cap/Base                           | E27      |

## Performance data

|   |       |
|---|-------|
| Nominal/ Rated Beam Angle [°]                   | 240   |
| Rated Lumens [lm]                               | 810   |
| Weighted energy consumption [kWh/1000h]         | 9     |
| Rated efficacy [lm/W]                           | 90    |
| Energy efficiency class (EEC)                   | A+    |
| Rated life L70/B50 [h]                          | 15000 |
| Nominal correlated colour temperature (CCT) [K] | 4000  |
| Nominal lumens [lm]                             | 810   |
| Colour Rendering Index (CRI) [Ra]               | 80    |


## Electrical data

|   |                  |
|---|------------------|
| Nominal lamp power factor...                | >0.7             |
| Operating Temperature (MIN) [°C]            | -20°C            |
| Operating Temperature (MAX) [°C]            | +40°C            |
| Starting time (sec)                         | <0.5 s           |
| Warm up time up to 60% of full light output | Instant on       |
| Number of switching cycles                  | 50k              |
| Nominal lamp voltage range [V]              | 220-240V 50/60Hz |
| Nominal power [W]                           | 9                |

## Logistic data

|                |                |
|----------------|----------------|
| Shipment       | Standard       |
| DUN Code       | 15994100023613 |
| EAN Code       | 5994100023616  |
| Pack Quantity  | 15             |
| Product status | Available      |

## Photometric Data

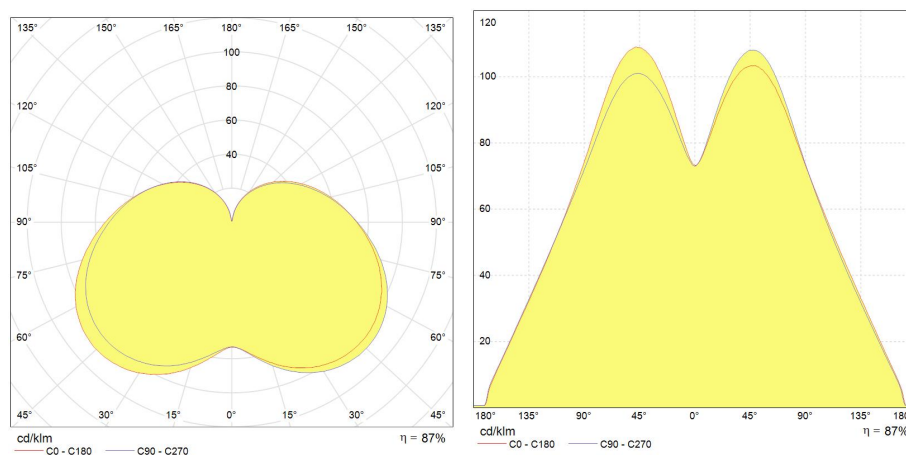

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Product datasheet \(PDF\)](#)

[Datasheet \(PDF\)](#)

[Images \(HTTP\)](#)

